
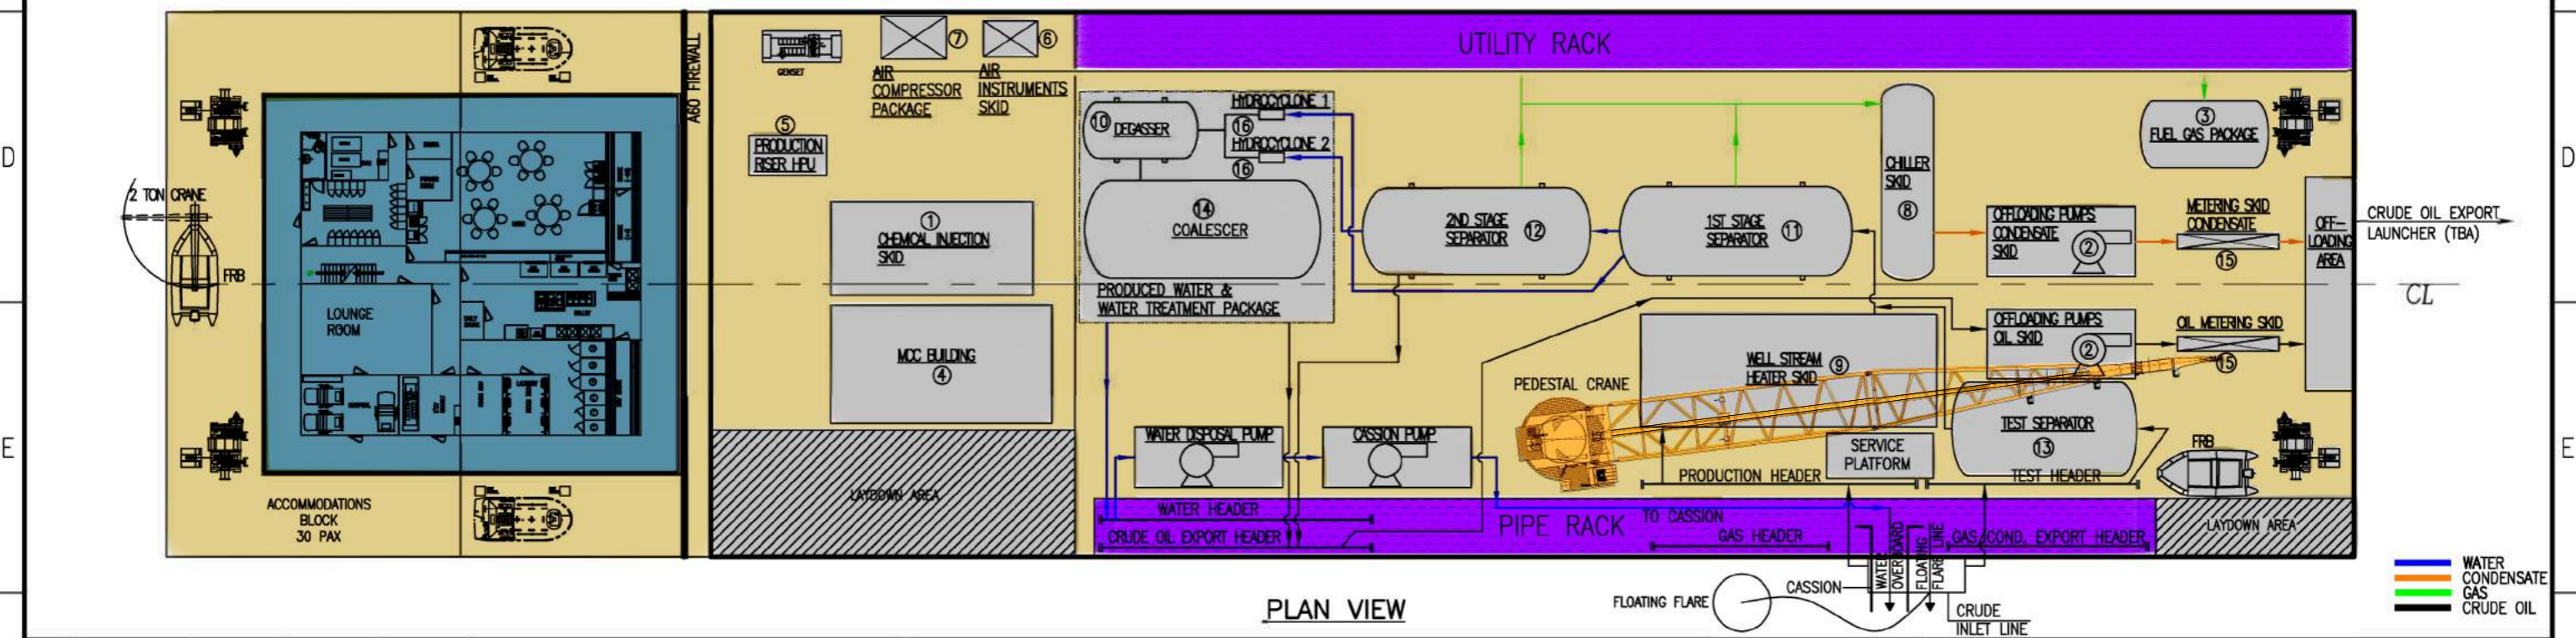


PRODUCTION BARGE MAJOR EQUIPMENT LIST								
ITEM #	DESCRIPTION	QTY.	SERIAL NO.	L (M)	W (M)	HT. (M)	WT. (KG.)	VOL.(CBM)
①	CHEMICAL INJECTION SKID	1	G-G 1	10.39	4.8	5.61	27,240	280
②	OFFLOADING PUMPS (OIL/CONDENSATE)	1	G-G 3	7.62	3.58	3.10	16,116	84.60
③	FUEL GAS PACKAGE	1	G-G 5	6.58	3.43	4.11	6,804	92.80
④	MCC BUILDING	1	G-G 7	11.35	6.98	6.10	45,360	483.60
⑤	PRODUCTION RISER HPU	1	G-G 9	3.96	2.03	2.92	1,362	23.50
⑥	AIR INSTRUMENTS PACKAGE	1	G-G 12	2.77	1.83	3.07	2,270	15.60
⑦	AIR COMPRESSOR PACKAGE	1	G-G 13	3.35	2.21	2.24	4,540	16.60
⑧	CHILLER PACKAGE	1	G-G 17	10.06	2.67	9.50	54,432	254.90

PRODUCTION BARGE MAJOR EQUIPMENT LIST								
ITEM #	DESCRIPTION	QTY.	SERIAL NO.	L (M)	W (M)	HT. (M)	WT. (KG.)	VOL.(CBM)
⑨	WELL STREAM HEATER	1	G-G 19	15.24	5.79	4.32	70,308	381.10
⑩	DEGASSER	1	G-G 20	5.87	2.9	4.34	21,400	73.80
⑪	1ST STAGE SEPARATOR	1	G-G 22	11.94	4.57	4.57	77,112	249.60
⑫	2ND STAGE SEPARATOR	1	G-G 23	11.79	4.45	4.57	77,112	239.50
⑬	TEST SEPARATOR	1	G-G-30	9.5	4.8	8.5	79,000	387.60
⑭	COALESCER	1	G-G-32	12.1	4.8	8.5	80,000	514.25
⑮	OIL/CONDENSATE METERING SKID	1	-	5.21	0.750	1.85	-	-
⑯	HYDROCYCLONE	1	-	1.3	0.5	1.1	360	-
TOTAL WEIGHT								563.416 MT

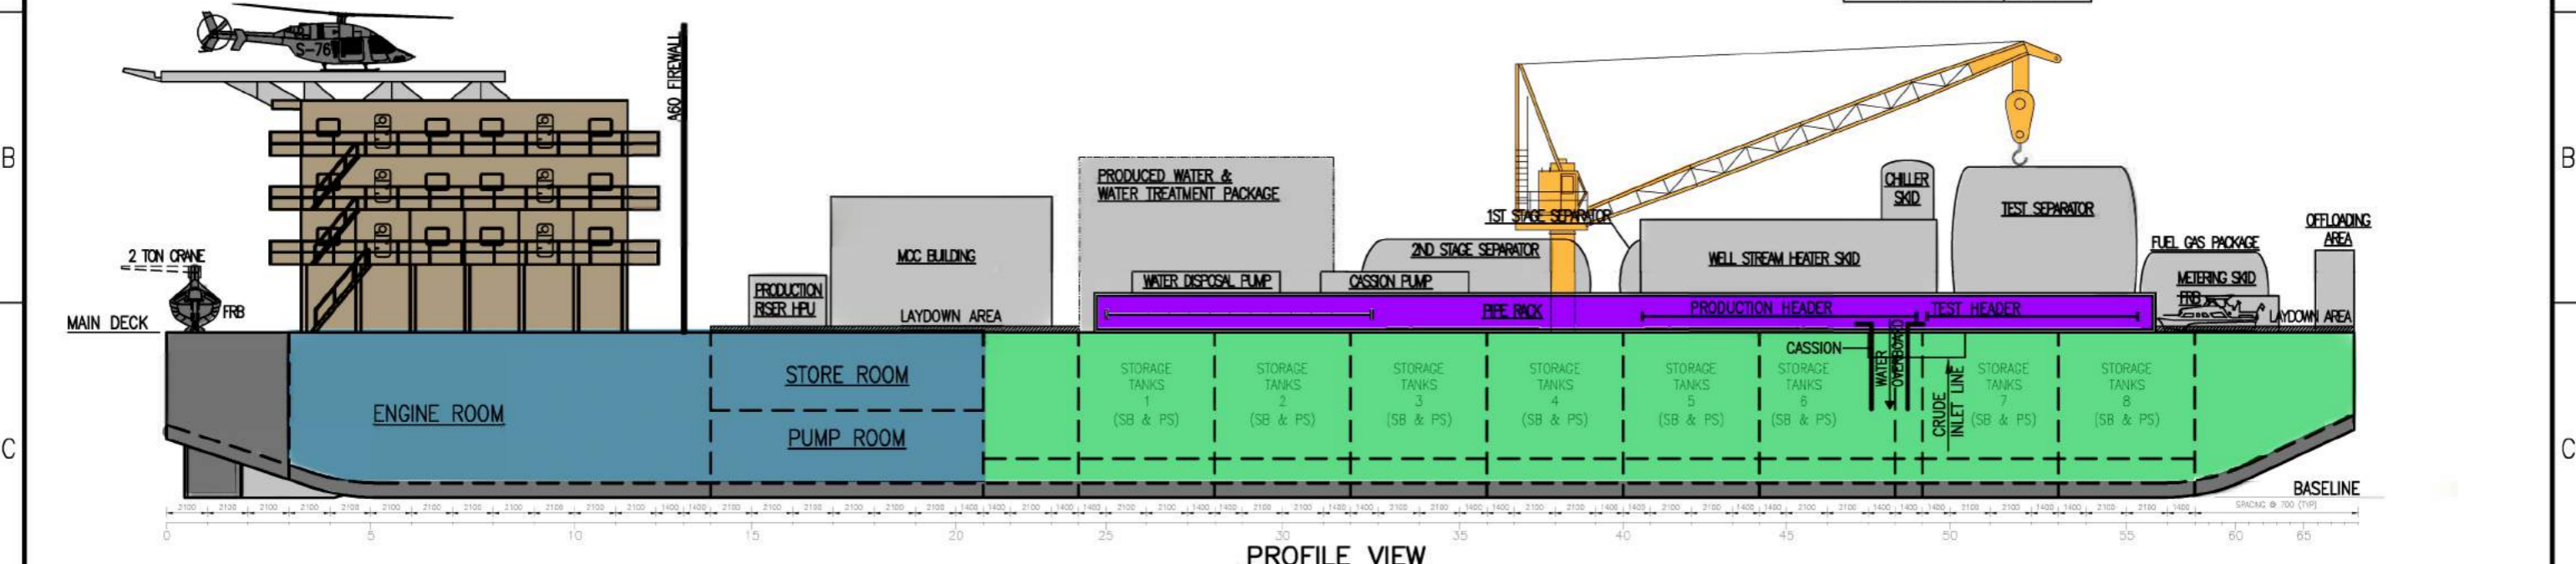

Rev	Date	Drawn	Checked	Approved	Description
B	13/04/12	RM	ARK	SS	ISSUED FOR APPROVAL
A	20/03/12	RM	ARK	SS	ISSUED FOR COMMENTS

Client/Project					
Filename: N:\Bids\B292					
Drawing number: WE-B292-D02		Sheet: 1 OF 1		Rev. B	
Scale: 1:325		Size: A3		Client Drawing number: -	

**FLOATING WELL TEST BARGE  
PEDESTAL CRANE  
LAYOUT & EQUIPMENT LIST**

**DAIHO**  
 ENERGY SERVICES PTE LTD  
 Daiho Energy Services Pte Ltd  
 105 Cecil Street  
 #12-01 The Octagon  
 Singapore 069534  
 Tel: +65 6226-1186  
 Fax: +65 6226-1187